

MICROTRAC - X100

Ver: 9.0h
Meas : Original

Serial Number: F2076


D50:0.97+ 0.05

Date: 11/12/20 Meas #:N/A
Time: 15:12 Pres #: N/A

HENAN YALONG SUPERHARO MATERIALS CO;LTD
16-5A NO.43 ZHONGYUAN WEST ROAD
ZHENG ZHOU P.C.450007 CHINA
TEL:86-371-67650359
FAX:86-371-67650319

| Summary | Percentiles | | |
|------------|-------------|-------------|--|
| mv = 1.025 | 5% = 0.719 | 60% = 1.045 | |
| mn = 0.901 | 10% = 0.774 | 70% = 1.104 | |
| ma = 0.980 | 30% = 0.895 | 80% = 1.183 | |
| cs = 6.124 | 40% = 0.943 | 90% = 1.313 | |
| sd = 0.203 | 50% = 0.992 | 95% = 1.442 | |

| Dia | Vol% | Width |
|-------|------|-------|
| 0.992 | 100% | 0.406 |

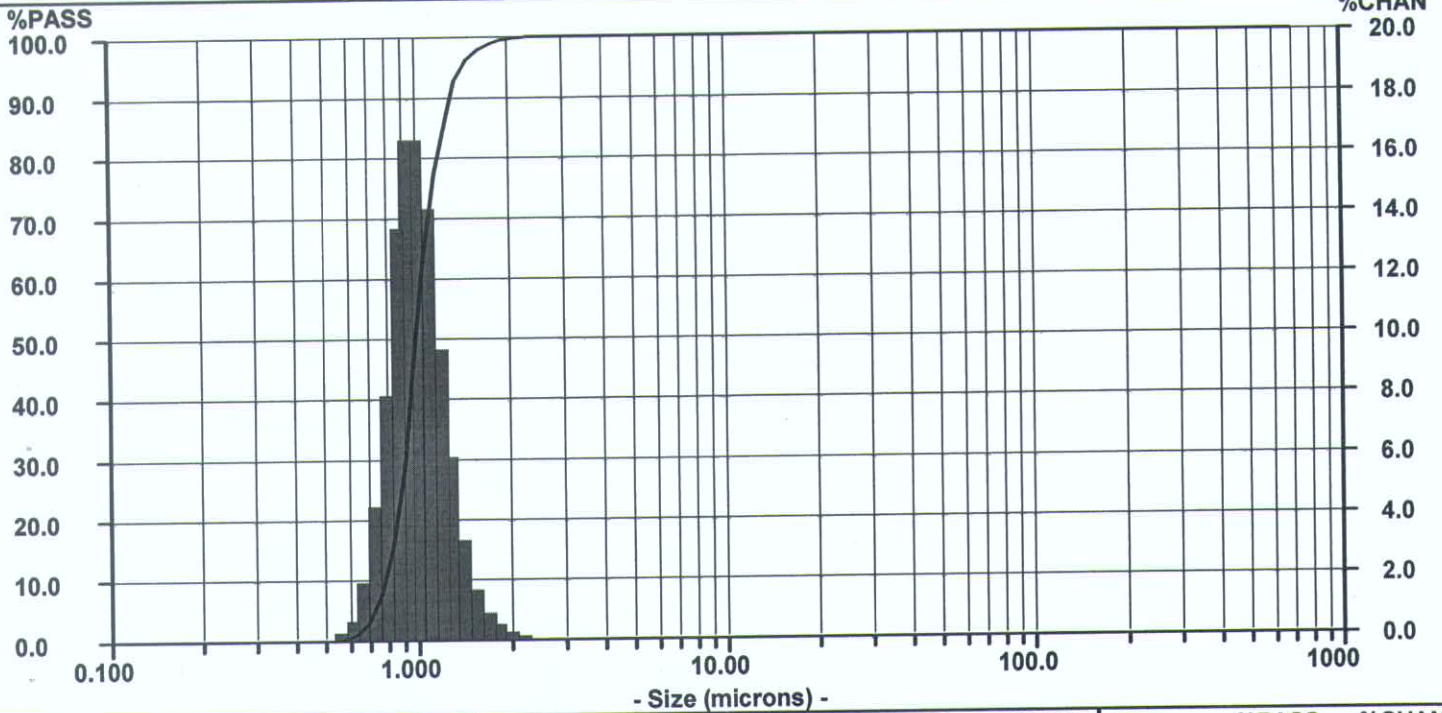

| SIZE | %PASS | %CHAN | SIZE | %PASS | %CHAN | SIZE | %PASS | %CHAN | SIZE | %PASS | %CHAN |
|-------|--------|-------|-------|--------|-------|-------|--------|-------|-------|-------|-------|
| 704.0 | 100.00 | 0.00 | 80.70 | 100.00 | 0.00 | 9.250 | 100.00 | 0.00 | 1.060 | 62.76 | 16.70 |
| 645.6 | 100.00 | 0.00 | 74.00 | 100.00 | 0.00 | 8.482 | 100.00 | 0.00 | 0.972 | 46.06 | 16.61 |
| 592.0 | 100.00 | 0.00 | 67.86 | 100.00 | 0.00 | 7.778 | 100.00 | 0.00 | 0.892 | 29.45 | 13.77 |
| 542.9 | 100.00 | 0.00 | 62.23 | 100.00 | 0.00 | 7.133 | 100.00 | 0.00 | 0.818 | 15.68 | 8.20 |
| 497.8 | 100.00 | 0.00 | 57.06 | 100.00 | 0.00 | 6.541 | 100.00 | 0.00 | 0.750 | 7.48 | 4.48 |
| 456.5 | 100.00 | 0.00 | 52.33 | 100.00 | 0.00 | 5.998 | 100.00 | 0.00 | 0.688 | 3.00 | 1.92 |
| 418.6 | 100.00 | 0.00 | 47.98 | 100.00 | 0.00 | 5.500 | 100.00 | 0.00 | 0.630 | 1.08 | 0.69 |
| 383.9 | 100.00 | 0.00 | 44.00 | 100.00 | 0.00 | 5.044 | 100.00 | 0.00 | 0.578 | 0.39 | 0.29 |
| 352.0 | 100.00 | 0.00 | 40.35 | 100.00 | 0.00 | 4.625 | 100.00 | 0.00 | 0.530 | 0.10 | 0.10 |
| 322.8 | 100.00 | 0.00 | 37.00 | 100.00 | 0.00 | 4.241 | 100.00 | 0.00 | 0.486 | 0.00 | 0.00 |
| 296.0 | 100.00 | 0.00 | 33.93 | 100.00 | 0.00 | 3.889 | 100.00 | 0.00 | 0.446 | 0.00 | 0.00 |
| 271.4 | 100.00 | 0.00 | 31.11 | 100.00 | 0.00 | 3.566 | 100.00 | 0.00 | 0.409 | 0.00 | 0.00 |
| 248.9 | 100.00 | 0.00 | 28.53 | 100.00 | 0.00 | 3.270 | 100.00 | 0.00 | 0.375 | 0.00 | 0.00 |
| 228.2 | 100.00 | 0.00 | 26.16 | 100.00 | 0.00 | 2.999 | 100.00 | 0.00 | 0.344 | 0.00 | 0.00 |
| 209.3 | 100.00 | 0.00 | 23.99 | 100.00 | 0.00 | 2.750 | 100.00 | 0.00 | 0.315 | 0.00 | 0.00 |
| 191.9 | 100.00 | 0.00 | 22.00 | 100.00 | 0.00 | 2.522 | 100.00 | 0.00 | 0.289 | 0.00 | 0.00 |
| 176.0 | 100.00 | 0.00 | 20.17 | 100.00 | 0.00 | 2.312 | 100.00 | 0.15 | 0.265 | 0.00 | 0.00 |
| 161.4 | 100.00 | 0.00 | 18.50 | 100.00 | 0.00 | 2.121 | 99.85 | 0.30 | 0.243 | 0.00 | 0.00 |
| 148.0 | 100.00 | 0.00 | 16.96 | 100.00 | 0.00 | 1.945 | 99.55 | 0.51 | 0.223 | 0.00 | 0.00 |
| 135.7 | 100.00 | 0.00 | 15.56 | 100.00 | 0.00 | 1.783 | 99.04 | 0.97 | 0.204 | 0.00 | 0.00 |
| 124.5 | 100.00 | 0.00 | 14.27 | 100.00 | 0.00 | 1.635 | 98.07 | 1.77 | 0.187 | 0.00 | 0.00 |
| 114.1 | 100.00 | 0.00 | 13.08 | 100.00 | 0.00 | 1.499 | 96.30 | 3.40 | 0.172 | 0.00 | 0.00 |
| 104.7 | 100.00 | 0.00 | 12.00 | 100.00 | 0.00 | 1.375 | 92.90 | 6.09 | 0.158 | 0.00 | 0.00 |
| 95.96 | 100.00 | 0.00 | 11.00 | 100.00 | 0.00 | 1.261 | 86.81 | 9.64 | 0.145 | 0.00 | 0.00 |
| 88.00 | 100.00 | 0.00 | 10.09 | 100.00 | 0.00 | 1.156 | 77.17 | 14.41 | 0.133 | 0.00 | 0.00 |

Distribution: Volume
Progression: Geometric Root8
Upper Edge: 704.0
Lower Edge: 0.122
Residuals: Disabled
Number Of Channels: 100
X100 Extended Range: No
Filter: On

RunTime: 10 seconds
Run Number 1 of 1 runs
Particle: W 0.5
Particle Transparency: Trans
Particle Refractive Index: 2.41
Particle Shape: Irregular
Database Path: N/A

Fluid: Water
Fluid Refractive Index: 1.33
Loading Factor: 0.0108
Transmission: 0.94
Above Residual: 0.00
Below Residual: 0.00